

MacDon[®] *The Harvesting Specialists.*

MacDon
FD130
FLEXDRAPER[®]

Draper Headers for Combine




D1 & FD1 Series Draper Header Performance

The next level of incredible draper performance

Most combine headers perform well in perfect harvesting conditions, but when was the last time you had perfect conditions? MacDon FlexDraper® and Draper Headers are designed to maximize productivity in the most challenging harvesting situations, from our Active Float System that keeps our headers true-to-the-ground, to the outstanding performance of our reel. Available in sizes up to 13.7 m (45'), MacDon combine drapers are built tough to deliver worry-free harvesting performance with any crop, in any, any condition, and on any combine.


A ACTIVE FLOAT SYSTEM

MacDon's Active Float System reacts instantly to changing ground conditions. This immediate float response means you can cut extremely close to the ground without pushing soil. Two sets of coil springs on the FM100 Float Module support up to 97% of the header weight. The instant float response provides 4.8 degrees of lateral float and 178 mm (7") of vertical float independent of the combine feeder house. MacDon's Active Float System keeps our headers true to the ground for a clean, even cut every time.

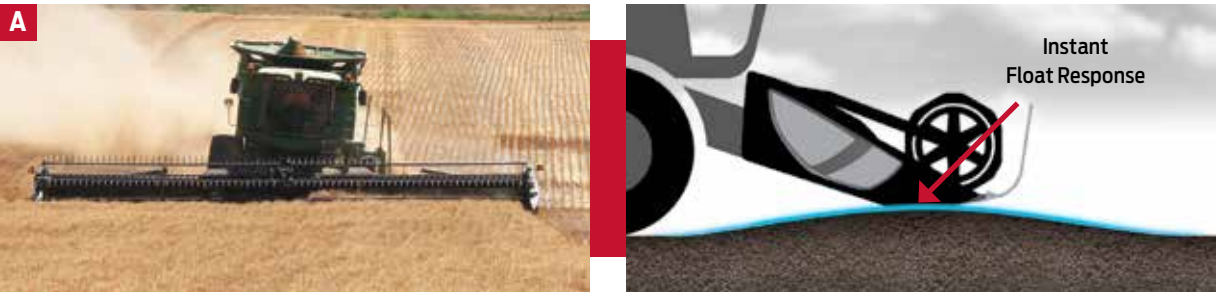


COMBINE INTERCHANGEABILITY

Thanks to the FM100, MacDon Draper Headers are designed to fit on all major brand combines with an easy-to-install completion package. This multi-brand compatibility means your investment will hold its value until it's time to update your header.

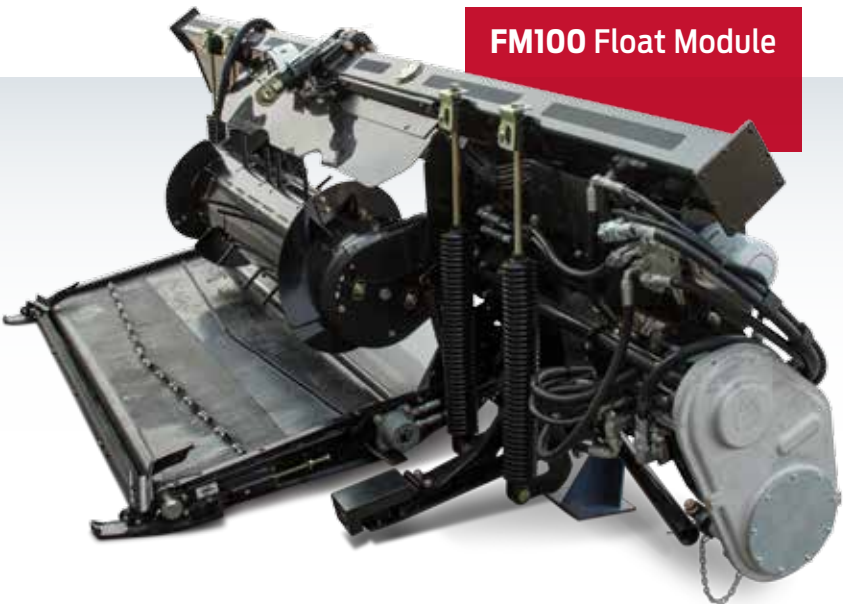


LATERAL & VERTICAL FLOAT		
HEADER SIZE	LATERAL FLOAT (1)	VERTICAL FLOAT (2)
9.1 m (30')	@ 4.8° = 411 mm (16")	178 mm (7")
10.6 m (35')	@ 4.8° = 505 mm (20")	178 mm (7")
12.2 m (40')	@ 4.8° = 549 mm (21.5")	178 mm (7")
13.7 m (45')	@ 4.8° = 617 mm (24")	178 mm (7")

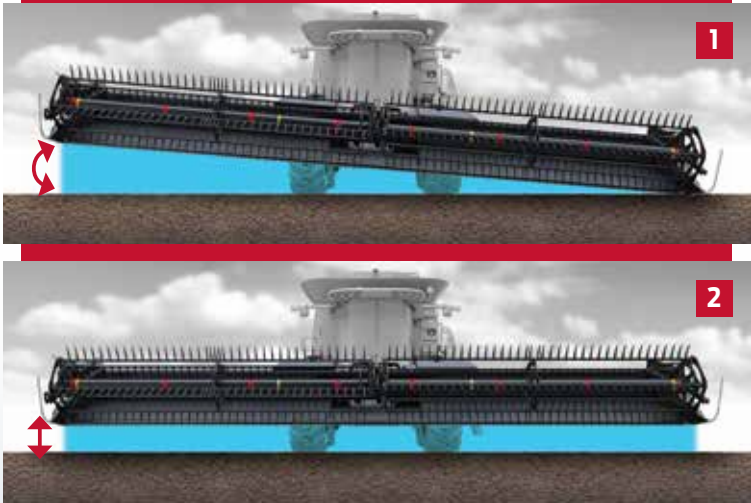

B ACTIVE CROP FLOW

Upgrading from a traditional auger platform to a MacDon Draper increases productivity during harvest. MacDon's Active Crop Flow gently places crop on the side drapers heads-first and swiftly moves it onto the feed draper, where it's scooped up into the combine's feeder house. Heads-first feeding promotes peak combine efficiency by saving fuel, improving threshing action, creating better straw distribution, and allowing for a more productive harvest overall. Because this harvesting method is more efficient in damp and moist conditions, you can start earlier and work later into the evening.

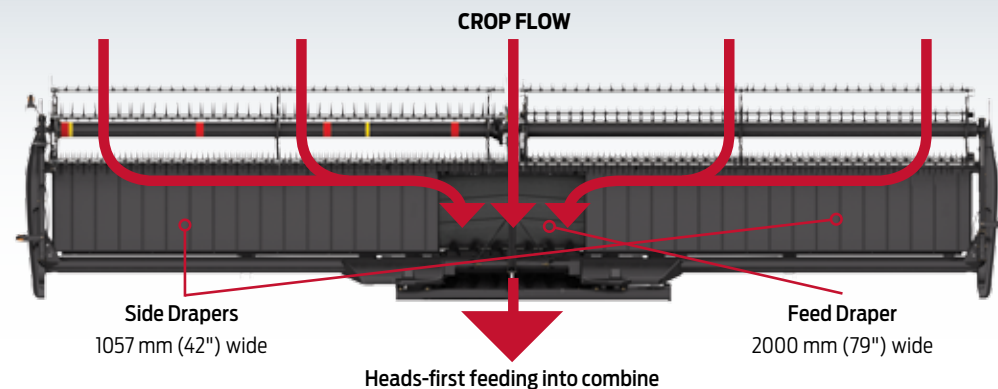


C OPTIMIZED FEEDING FOR SERIOUS CAPACITY

The Retracting Tine Drum (RTD) of the FM100 has been engineered to maximize crop feeding. Adjustable tine timing and long (154 mm (6")) tine extension, aggressively engage high volumes of crop. The in-feed crop width can be tailored to match specific combine feeder houses.



D AMAZING REEL PERFORMANCE

Unlike other headers, the movement of our heavy-duty reel picks up and gently places crop onto the drapers. The reel features a uniquely shaped cam, which allows the fingers to get underneath lodged crop and pick it up before it's cut. Along with the header tilt control, which hydraulically angles the knife from the cab, and fore-aft reel positioning, our headers can reduce, or altogether eliminate, the need for crop lifters.

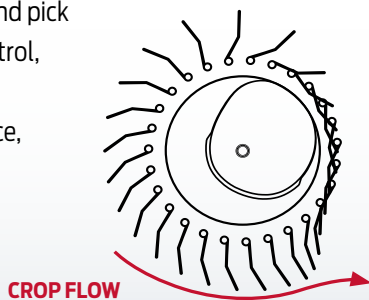

B



E MULTI-CROP HARVESTING SOLUTION

MacDon's D1 and FD1 Series headers are true multi-crop headers that are able to take down cereals, oil seeds, beans – just about any crop in any condition. The FD1 FlexDraper® switches easily from flex to a solid frame with the quick flip of a lever, giving you the ultimate flexibility to move from one crop-type to another. Any crop, any condition, MacDon Drapers are the ultimate performance upgrade for your combine.

F ON-THE-GO CONTROL

Automatic Header Height controls allow the operator to choose ground pressure, cutting height, and header tilt, all right from the operator's seat. When used with the optional Stabilizer Wheels, it allows for automatic cut heights of 30-560 mm (1-22").


		
Cut Height Without Skid Shoes 30-55 mm (1-2")	Cut Height With Skid Shoes 40-140 mm (1.5-5.5")	Cut Height With Stabilizer Wheels 120-560 mm (4.75-22")

G A CONSISTENTLY CLOSE SHAVE

MacDon's patented C-shaped low profile cutter bar design allows ground-level cutting for the most consistently close shave of your fields. Featuring a heavy-duty knife drive and in-cab knife angle control, this cutting system allows you to match any harvest conditions. The ultra-smooth ground-facing surface of our cutterbar helps our headers glide along the ground for a smooth close cut every time.

H FULL HEADER WIDTH UPPER CROSS AUGER

The optional upper cross auger is attached in front of the back tube and runs the full width of the header, on sizes ranging from 7.6 m (25') to 12.2 m (40'). The upper cross auger helps to move heavy, bushy, high-volume crops like oilseed rape and peas, to the center of the header for smooth feeding.

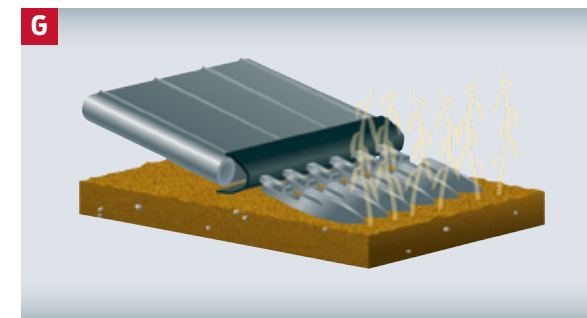



FD1 Series FlexDraper® Headers



ANY CROP
ANY CONDITION
ANY COMBINE




Ground following like never before

Featuring MacDon Flex-Float Technology™, FDI Series FlexDraper® continue to advance harvesting innovation. The flex advantage comes from a fixed reel-to-cutterbar relationship, which maintains a small gap between the reel fingers and cutterbar, while the Active Float System allows for instant lateral and vertical float response over rolling and uneven terrain. The result of our Flex-Float Technology™ is smooth, consistent, heads-first feeding that significantly boosts combine productivity.

FFT FLEX-FLOAT TECHNOLOGY®

A CLOSE REEL-TO-CUTTERBAR RELATIONSHIP

The MacDon FDI FlexDraper® features a fixed reel-to-cutterbar relationship. A small gap between the reel fingers and the cutterbar is maintained at all times, even at extreme flex, ensuring smooth, consistent, heads-first feeding of the crop over the entire width of the FlexDraper®.

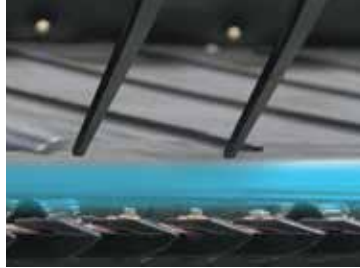


B ACTIVE FLOAT SYSTEM

MacDon's Active Float System reacts instantly to changing ground conditions. This immediate float response means you can cut extremely close to the ground without pushing soil. Two sets of coil springs on the FM100 Float Module support up to 97% of the header weight. The instant float response provides 4.8 degrees of lateral float and 178 mm (7") of vertical float, independent of the combine feeder house. MacDon's Active Float System keeps our headers true-to-the-ground for a clean, even cut every time.



C REEL PERFORMANCE

Unlike other headers, the movement of our heavy-duty reel picks up and gently places crop onto the drapers. The reel features a uniquely shaped cam, which allows the fingers to get underneath lodged crop and pick it up before it's cut. Along with the header tilt control, which hydraulically angles the knife from the cab, and fore-aft reel positioning, our headers can be adjusted for the toughest harvesting challenges.



D TRUE GROUND FOLLOWING

The MacDon FDI FlexDraper® is a floating, three-section flexible header with a split reel. This allows the entire header frame, cutterbar, and reel to follow ground contours as a unit, flexing up to 245 mm (10") on either end, while maintaining a close reel-to-cutterbar relationship. This unique three-section design lets the FDI FlexDraper® deliver smooth, consistent, heads-first feeding to the combine, even at extreme flex.



SPECIFICATIONS

D1 DRAPER HEADER SPECIFICATIONS

Size	25' (7.6 m)	30' (9.1 m)	35' (10.6 m)	40' (12.2 m)	45' (13.7 m)
Weight* Single Knife Drive with FM100	2510 kg (5534 lb)	3000 kg (6614 lb)	3150 kg (6945 lb)	-	-
Weight* Double Knife Drive with FM100	-	-	-	3498 kg (7712 lb)	3616 kg (7972 lb)
Knife: Type / Drive / Speed	Single or double knife (depending on size and application) / Hydraulic, MacDon design enclosed oil bath Wobble Box(es) / Single knife combine 1050 to 1400 spm, double knife combine 1100 to 1700 spm (speed varies depending on header size, faster knife speed on smaller headers or double knife headers)				
Guard Types Available	Pointed DHT (double heat-treated), stub SM (sheet metal hold-down, forged bottom guard), stub F (forged top and bottom)				
Reel: Type / Drive / Speed / Fingers	Pick-up reel, five or six bat, two-piece (double) or single, flip-over design, cam-leading finger control / Hydraulic / Combine 0 to 67 rpm (varies depending on combine model) / HD plastic, 152 mm (6") spacing, 279 mm (11") length				
Conveyor: Type / Drive / Speed / Delivery	1057 mm (41.6") wide 680.4 g (24 oz) rubber skim-coated drapers, reversible double V-guide with tracking, integral seal on leading edge / Combine 0 to 194 m/min (0 to 636 ft/min) / Mechanical deck shift, opening width 1539 mm (60.6") to 1948 mm (76.7")				
Field-Installed Options	Upper cross auger, stabilizer wheels, and other specialty option kits				

**All listed weights are approximations and will vary depending on header configuration. Check with your dealer for combine ratings.
Weight includes FM100 Combine Adapter. The FM100 Combine Adapter weighs approximately 1030 kg (2270 lb); this number varies by combine model.*

FD1 FLEXDRAPER® SPECIFICATIONS

Size	30' (9.1 m)	35' (10.6 m)	40' (12.2 m)	45' (13.7 m)
Weight* Single Knife Drive with FM100	3160 kg (6967 lb)	3364 kg (7416 lb)	-	-
Weight* Double Knife Drive with FM100	-	-	3676 kg (8104 lb)	3884 kg (8563 lb)
Knife: Type / Drive / Speed / Guards	Single or double knife / Hydraulic, MacDon design enclosed oil bath wobble box(es) / 1050 to 1400 spm, varies depending on header size / Pointed DHT (double heat-treated), strong, mud resistant profile			
Reel: Type / Drive / Speed / Fingers	Pick-up reel, 2-piece (double), flip-over design, cam-leading finger control / Hydraulic / 0 to 67 rpm varies depending on combine model / 279 mm (11") length, wear-resistant HD plastic, 102 mm (4") spacing			
Conveyor: Type / Drive / Speed	1057 mm (41.6") width, reversible 680.4 g (24 oz) rubber skim-coated drapers, double V-guide with tracking, integral seal on leading edge / Hydraulic / 0 to 194 m/min (0 to 636 ft/min) (Depending on combine model)			
Standard Features	Adapters for most current model combines, hydraulic fore-aft reel positioner, hydraulic header tilt, cutterbar poly wear plates, auto-header height with header angle and ground pressure indicators			
Field-Installed Options	Upper cross auger, stabilizer wheels, and other specialty option kits			

**All listed weights are approximations and will vary depending on header configuration. Check with your dealer for combine ratings.
Weight includes FM100 Combine Adapter. The FM100 Combine Adapter weighs approximately 1030 kg (2270 lb); this number varies by combine model.*

FM100 FLOAT MODULE SPECIFICATIONS


	Center Draper	Feed Auger
Size	2000 mm (78.7") width	1660 mm (65.3") width
Weight	Approximately 1030 kg (2270 lb), varies by combine model	
Type	Self-tracking, rubber-coated polyester fabric feed draper with rubber slats, hydraulic drive (reversible)	Floating auger, mechanical drive (reversible), removable retracting fingers with full-retraction when reversing
Speed	107-122 m/min (350 to 400 ft/min)	185-206 rpm, varies with combine model
Header Flotation: Type / Vertical Range / Lateral Range (tilt)	Two pairs of coil springs, independent adjustment, transport lock-out / 178 mm (7") / 4.8 degrees	
Fits most current model combines.		



MacDon®



*The Harvesting Specialists. **MacDon.com***

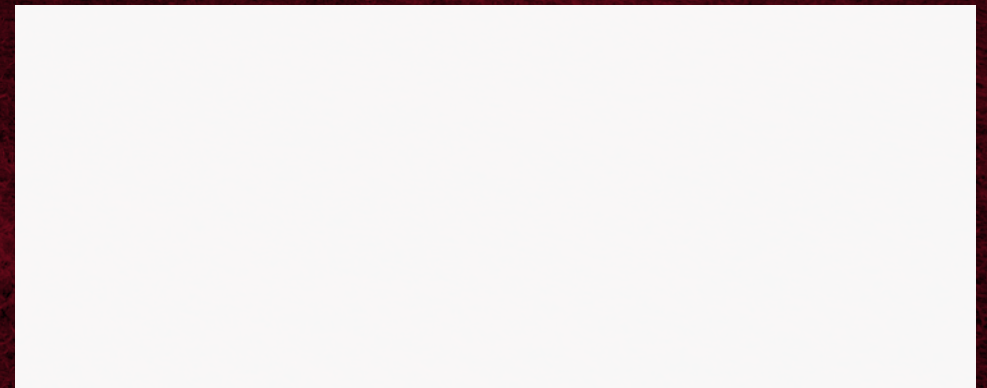

Trademarks of products are the marks of their respective manufacturers and/or distributors. Specifications and options subject to change without notice.
Products subject to availability. Products featured may include available options. **MD-0111D2 Combine Header Brochure 2017 Euro Part #214186**